

Development of a disposal system for deactivation of transdermal patches of fentanyl

Anushree Herwadkar¹, Neha Singh¹, Carter Anderson², Andrew Korey², William Fowler² Ajay K Banga¹

Objective

The objective of this study was to test a carbon fabric containing disposal system for its efficiency in deactivation of transdermal patches of fentanyl

Rationale

increasing concern regarding an misuse/abuse of controlled drug substances. Fentanyl is a potent opioid analgesic and a Schedule II Controlled Substance. Transdermal patches of fentanyl- Duragesic[®] are being used in the treatment of moderate to severe chronic pain. Duragesic patches are intended to be applied on to intact skin of patients for a maximum time period of 72 h. However, even after use, the patches retain significant amount of fentanyl resulting in a potential for drug misuse. It is therefore suggested that Duragesic patches be flushed down the drain after use which would minimize the drug abuse potential. However, this method of disposal may be a concern for environmental contamination with drugs. Hence, in our study we are investigating the feasibility of using an alternative carbon fabric containing disposal system of fentanyl for safe, effective and environmentally friendly drug disposal

Methods

Deactivation studies were carried out using marketed fentanyl transdermal patches- Duragesic[®] 12.5 µg/h in strength. The disposal system was composed of a carbon fabric material which could be enclosed between an adhesive tape and a liner. Deactivation was carried out by removing the liner of the disposal system, placing the Duragesic patches on wetted carbon fabric and sealing the system with the adhesive tape. Deactivation times of 8, 24, 48 and 96 h were tested after which the disposal system was either cut into small strips (condition 1) or torn open and the patch was removed out forcefully from the system (condition 2). A method was developed for complete extraction of fentanyl from the deactivated patches and deactivation was followed by a two step extraction process; first with water for 24 h and then with 30% ethanol for 24 h. The amount of fentanyl remaining in the system after deactivation was quantified using a stability indicating HPLC assay.




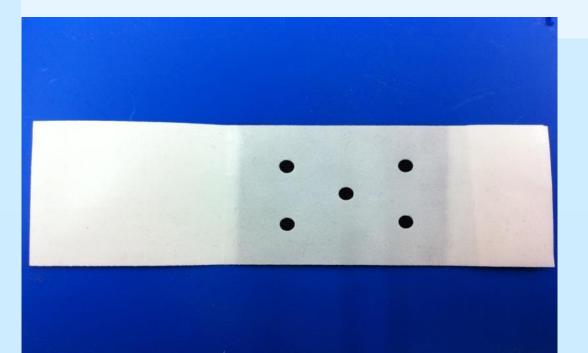



Figure 1: Image of the carbon fabric containing drug disposal system (MedsAway[™] Disposal System) for deactivation of transdermal patches

:Mercer University College of Pharmacy and Health Sciences, Atlanta, GA- 30341 ²: Verde Environmental Technologies Inc, Burnsville MN 55337

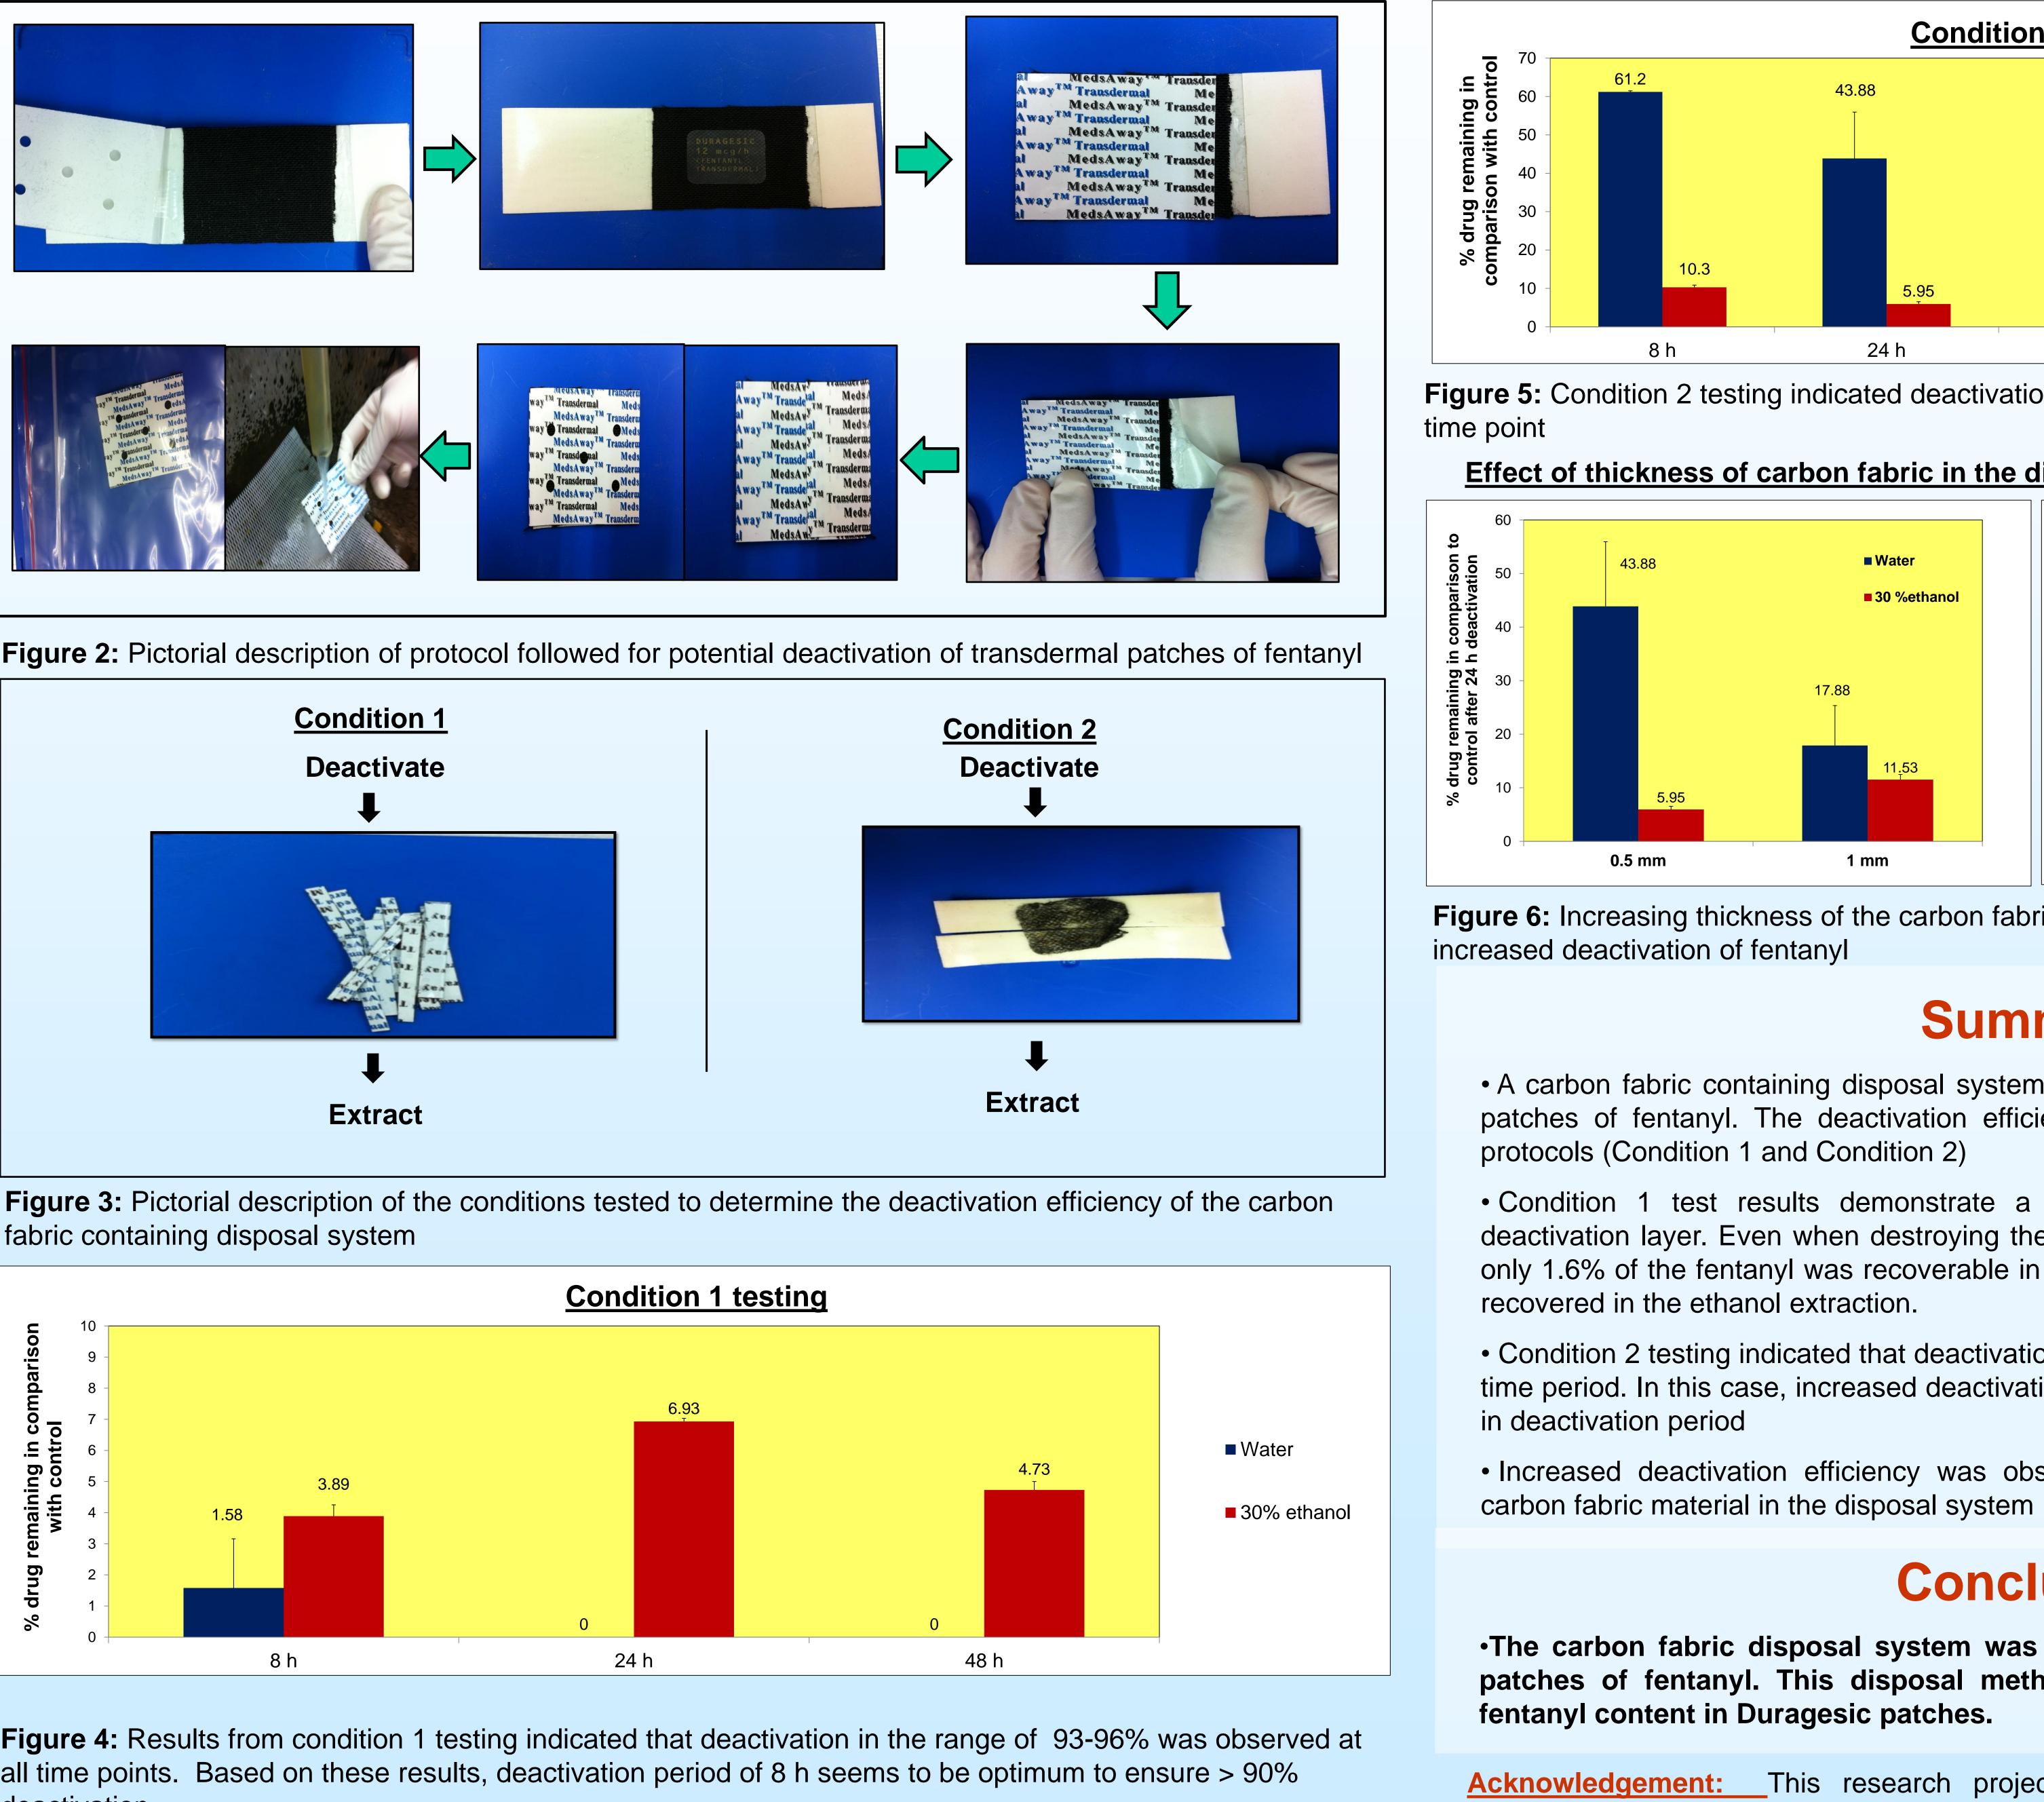

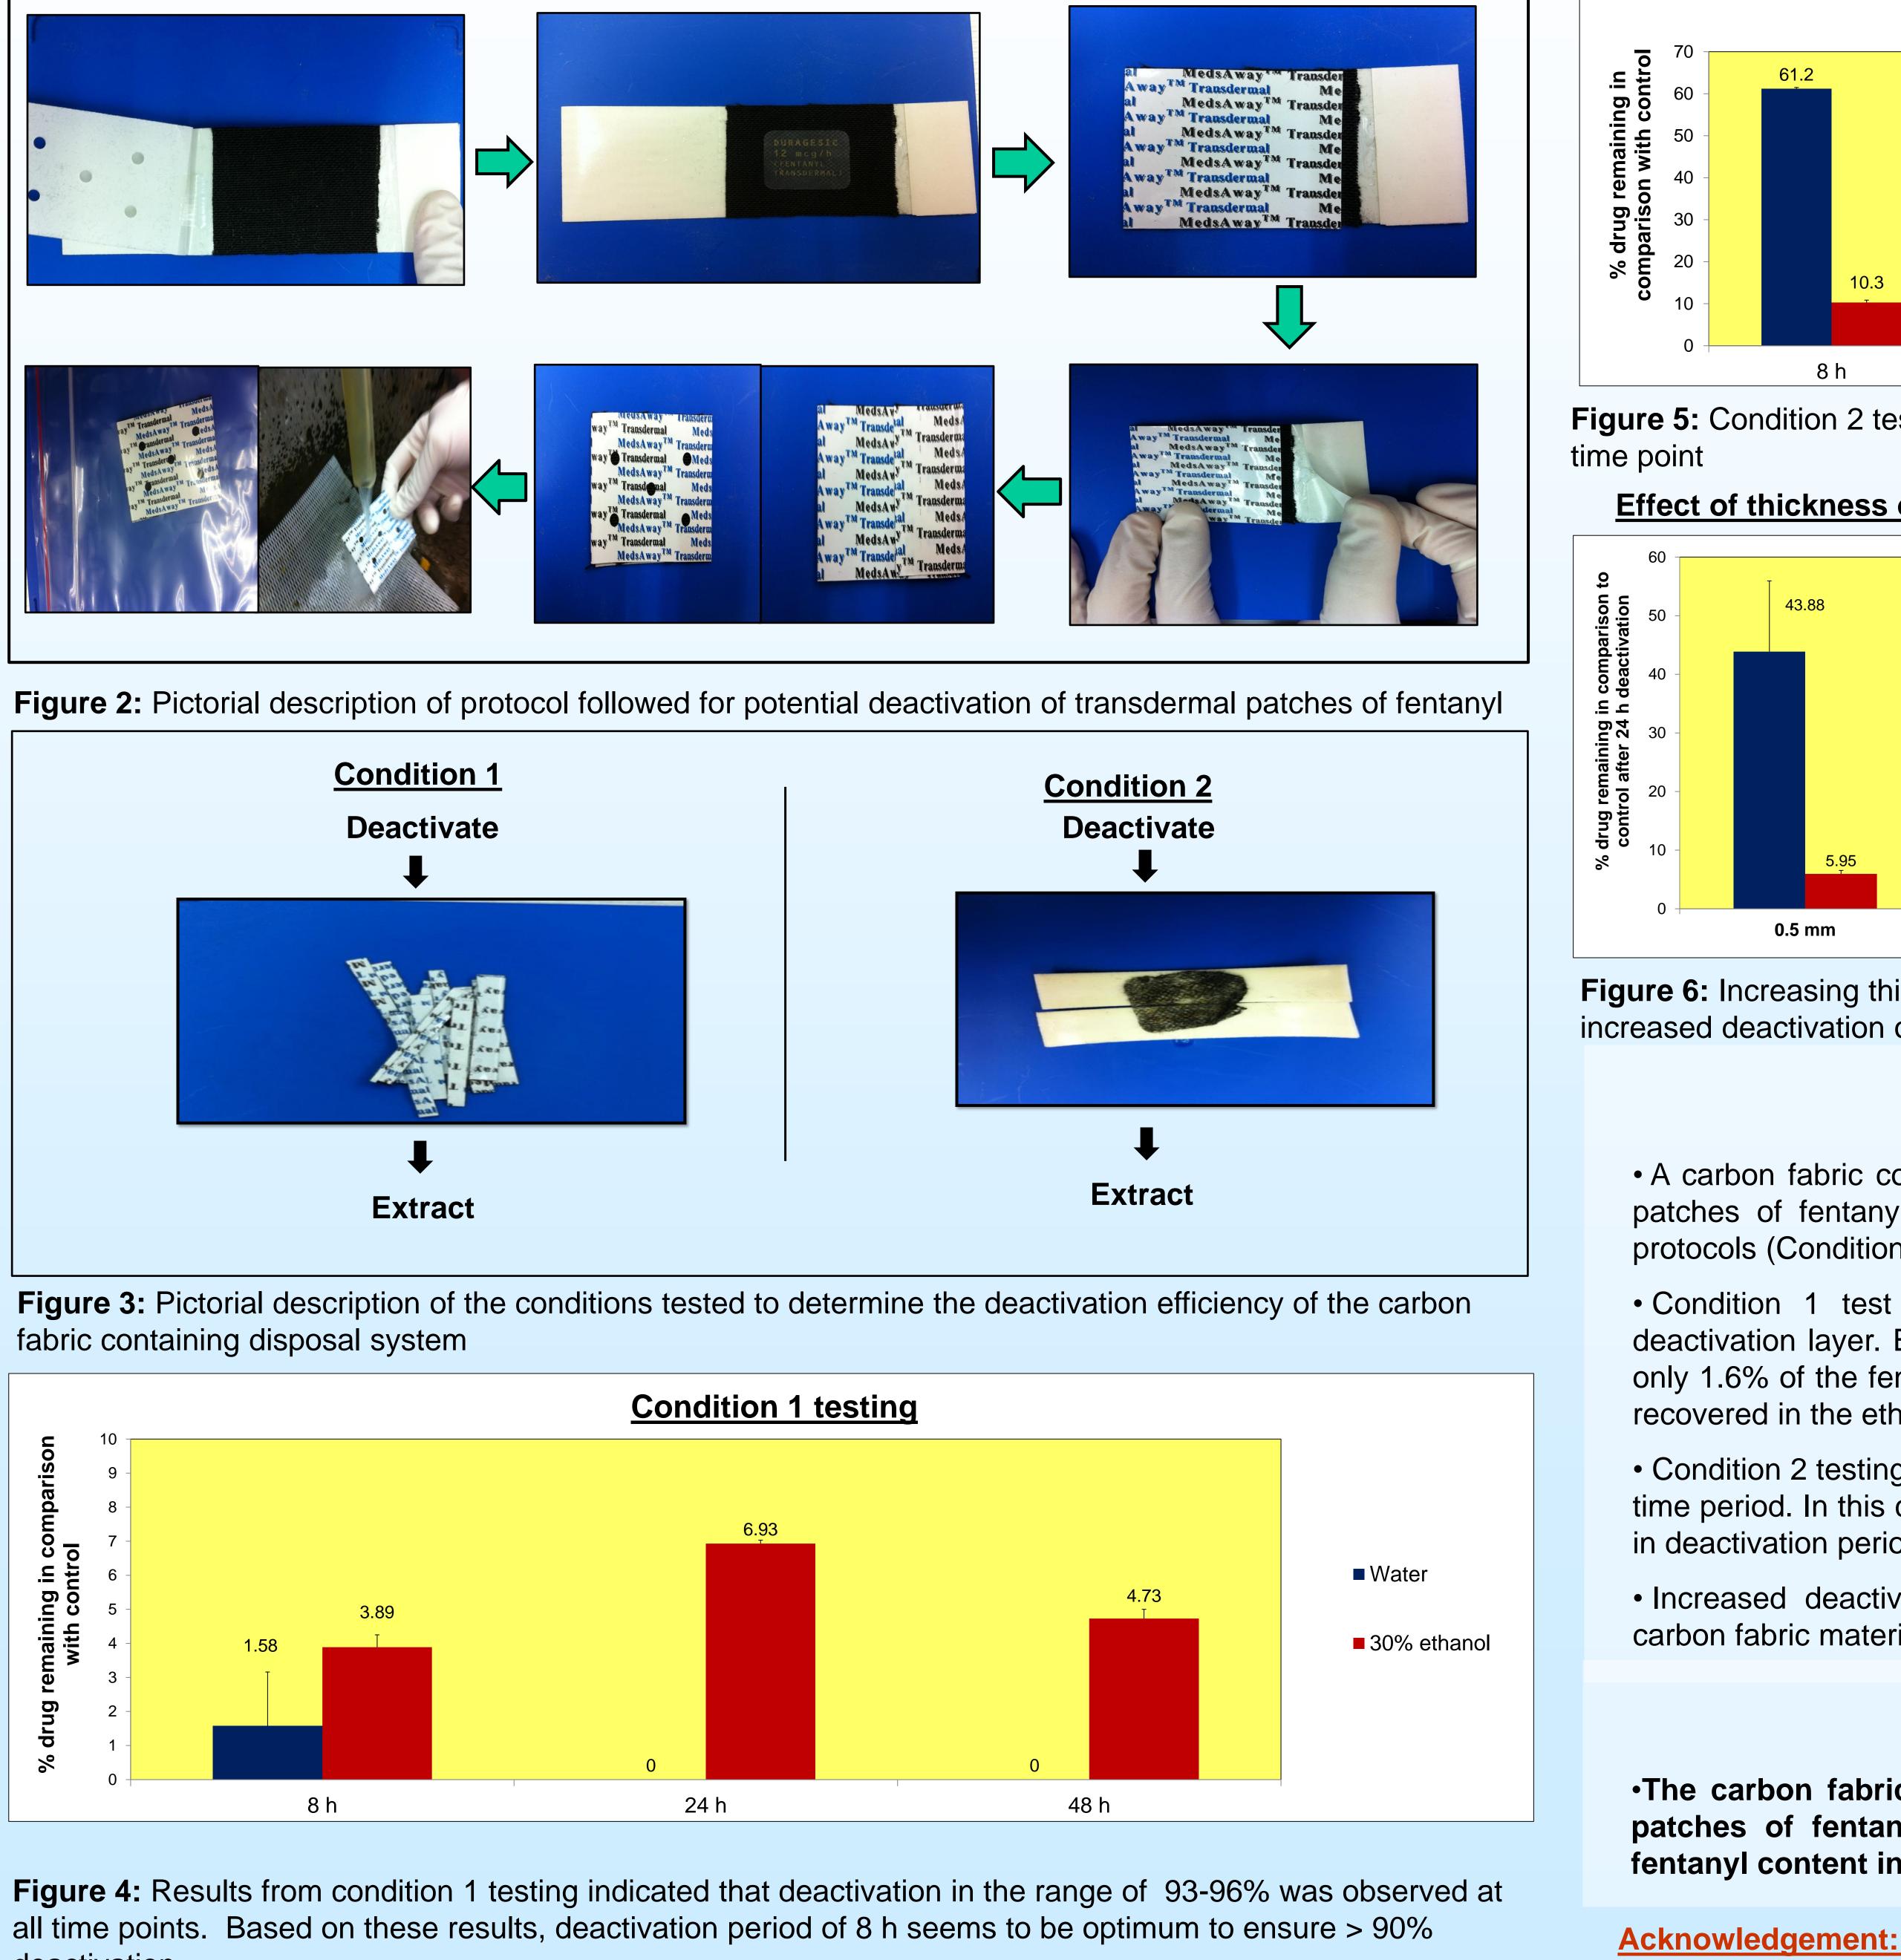

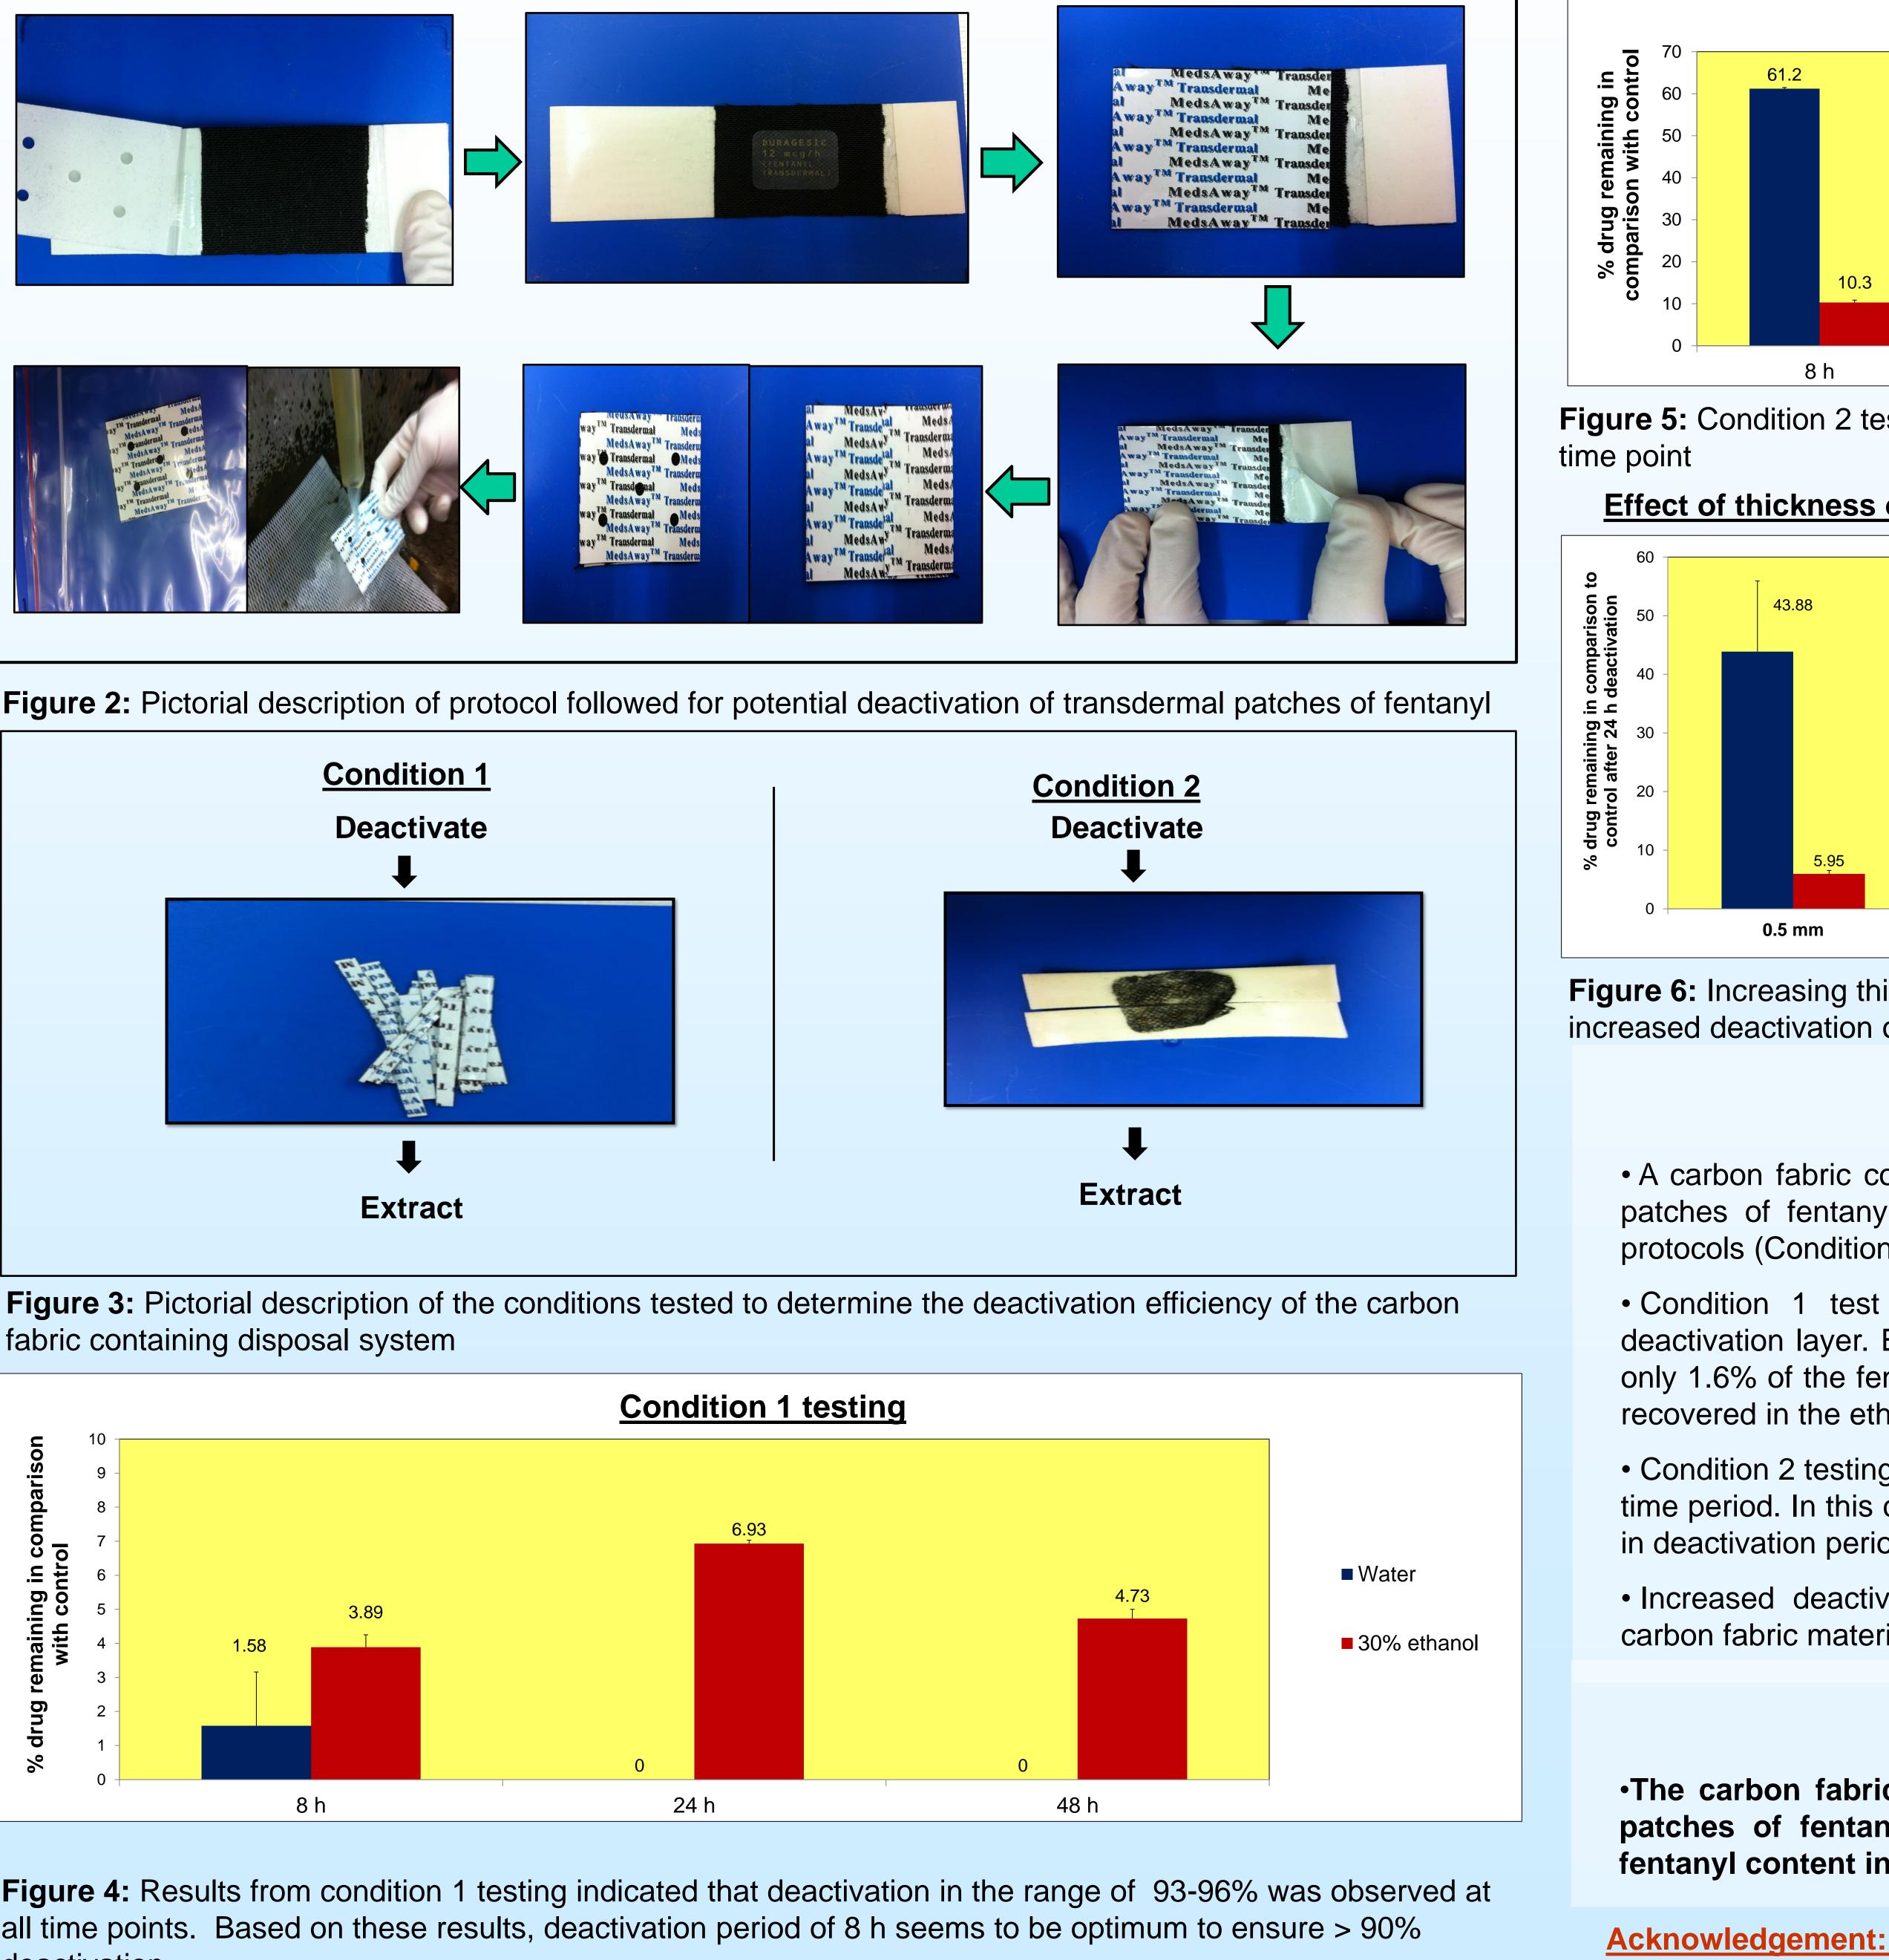

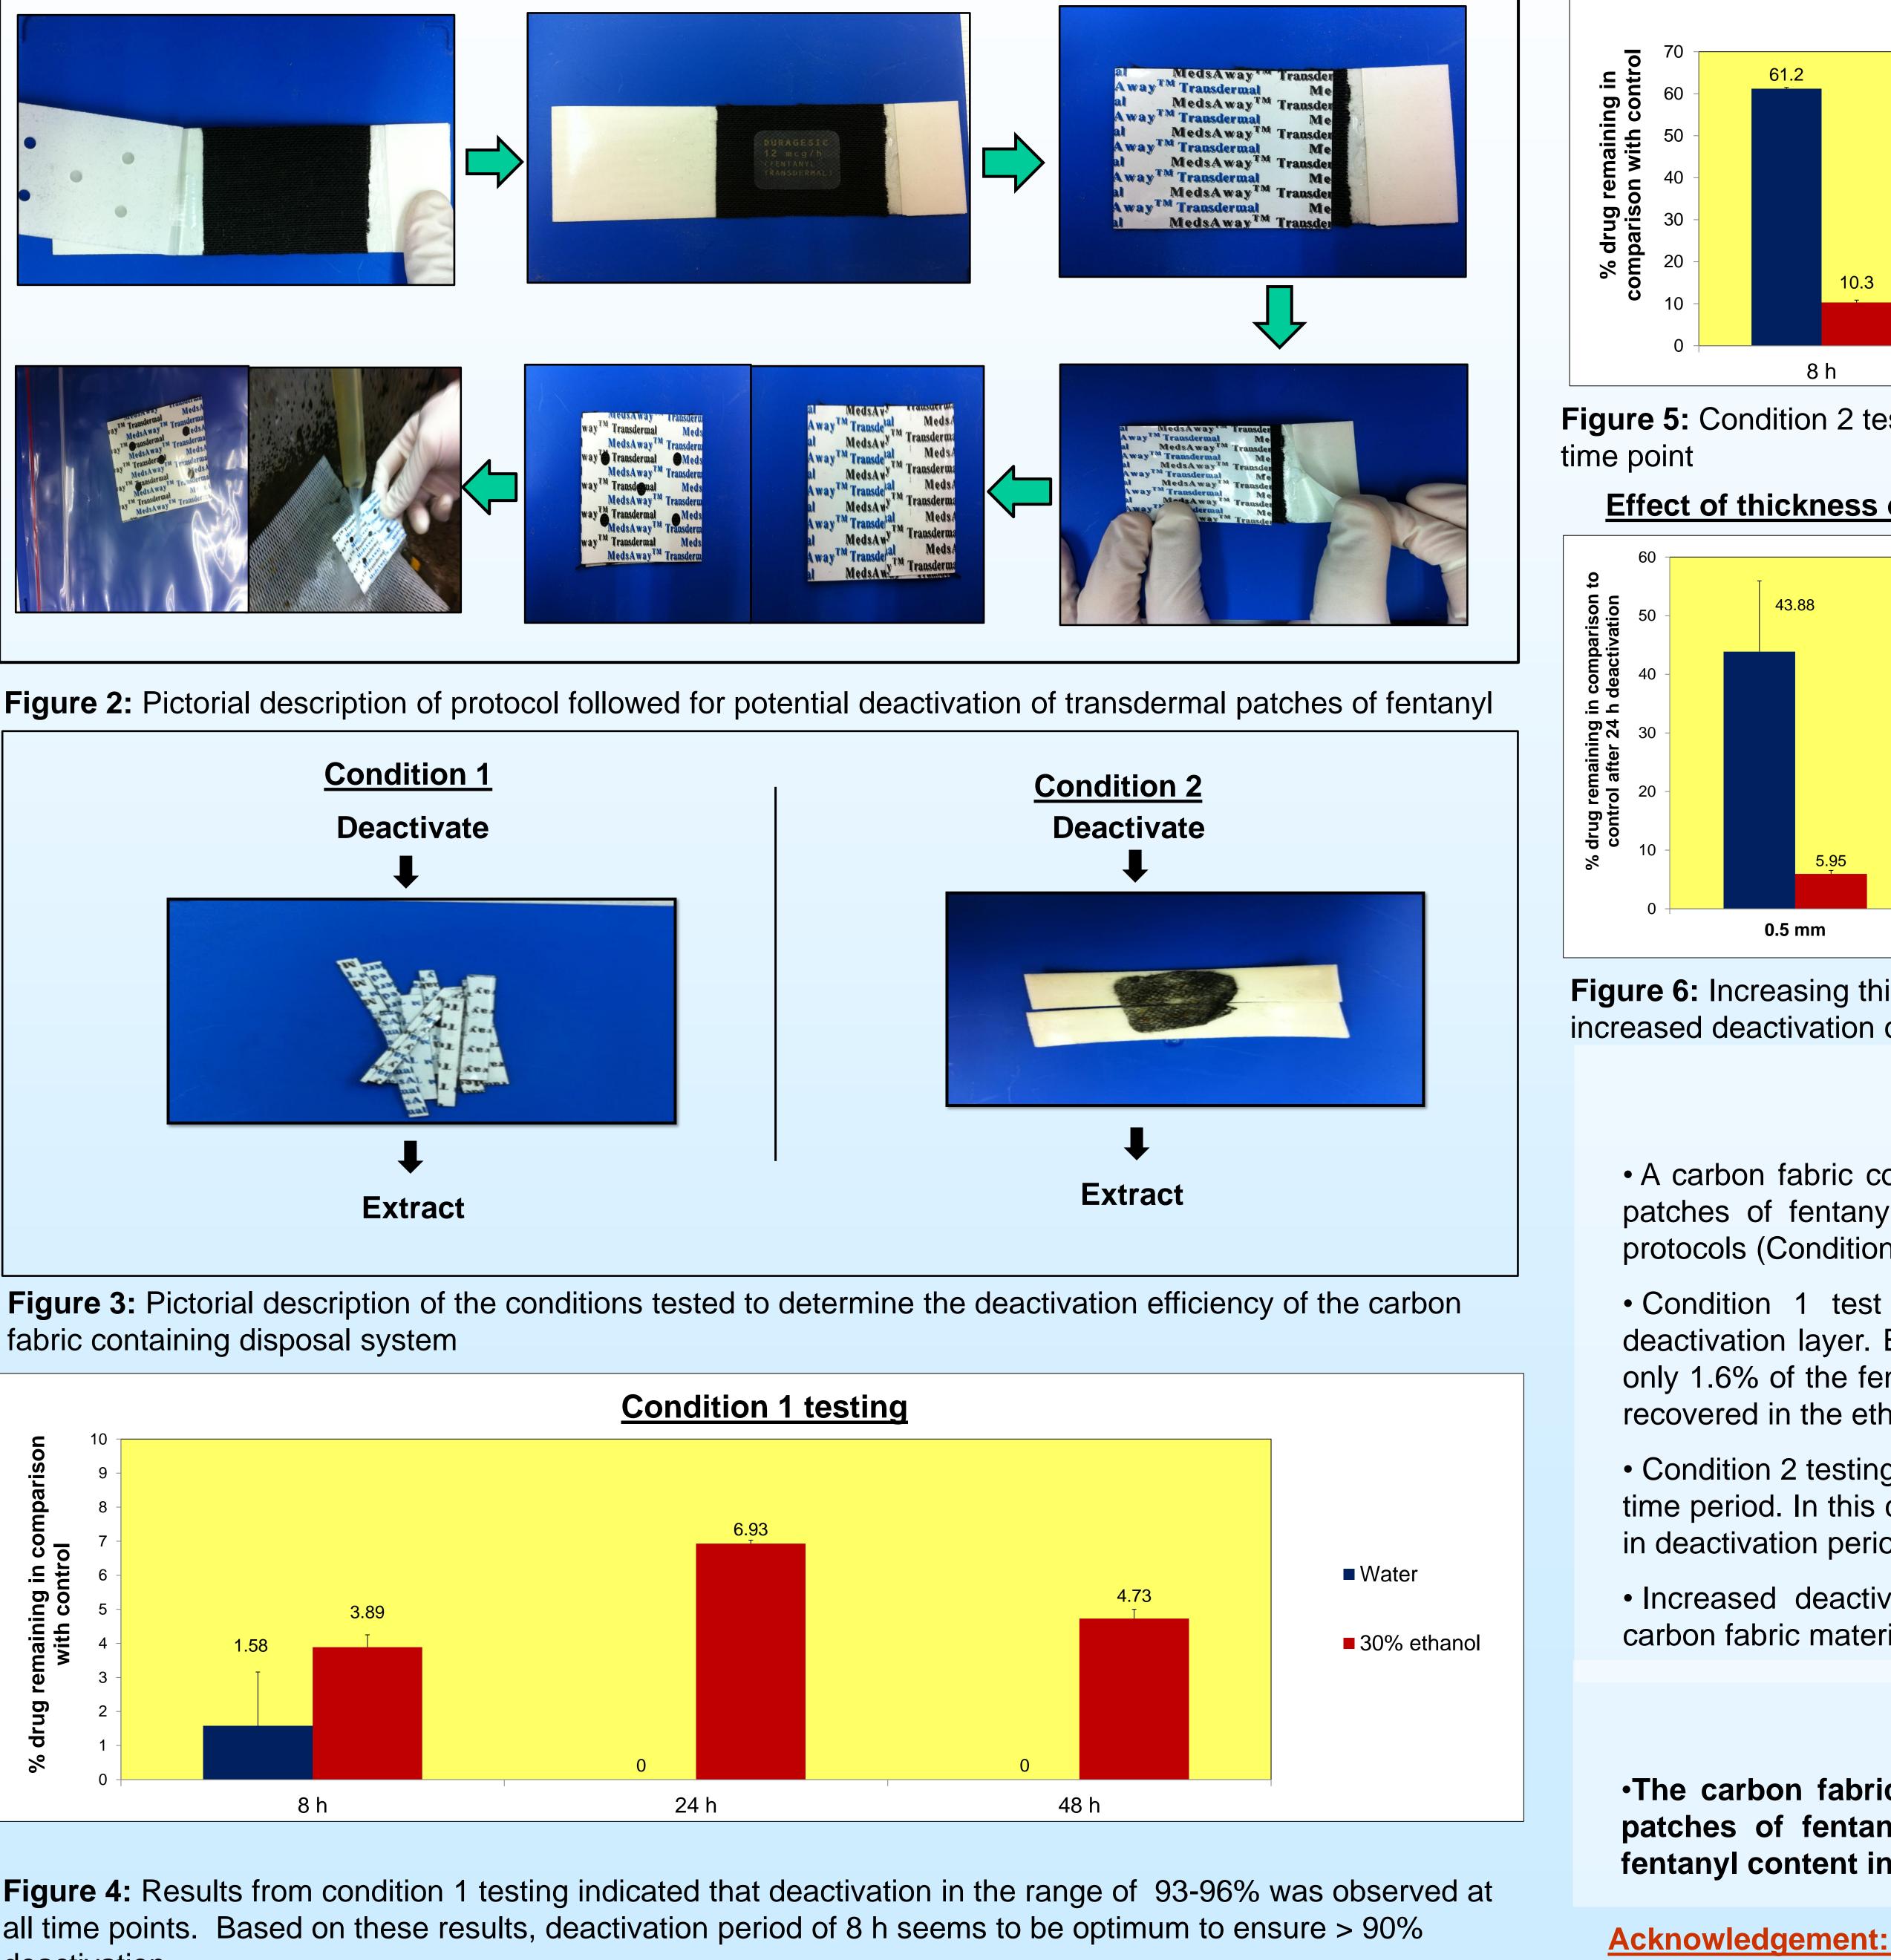

deactivation


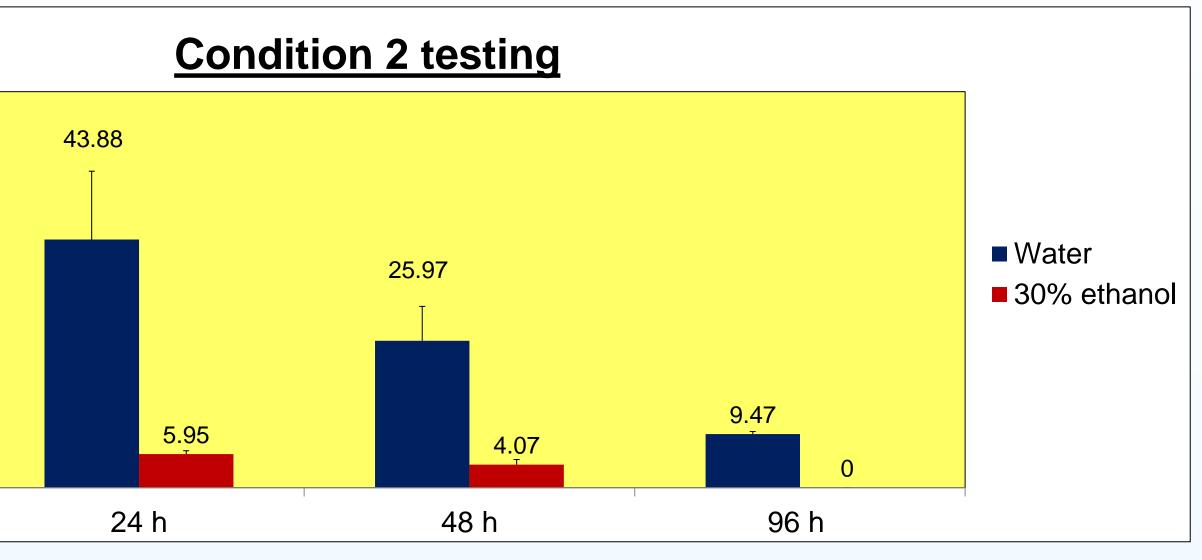


Figure 5: Condition 2 testing indicated deactivation of > 90% fentanyl wasobserved at the 96 h

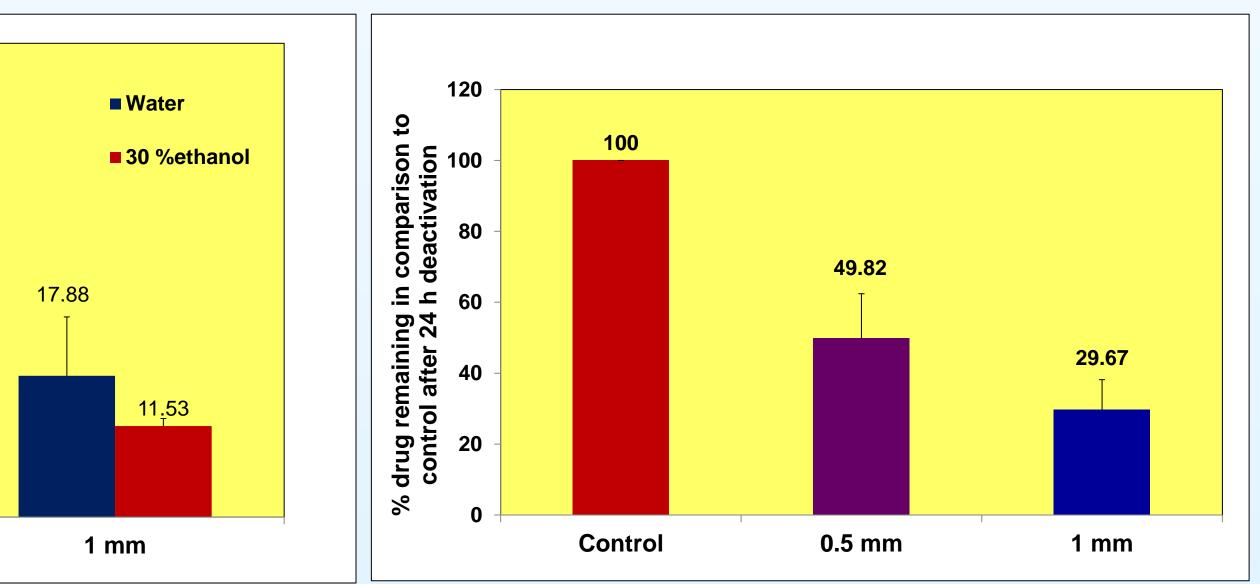

Effect of thickness of carbon fabric in the disposal system on deactivation of fentanyl

Figure 6: Increasing thickness of the carbon fabric material in the disposal system resulted in

Summary

• A carbon fabric containing disposal system was tested for deactivation of transdermal patches of fentanyl. The deactivation efficiency of the system was tested using two

• Condition 1 test results demonstrate a rapid benefit via encapsulation with the deactivation layer. Even when destroying the system by cutting it into strips, by 8 hours only 1.6% of the fentanyl was recoverable in the aqueous extraction, and only 3.9% was

• Condition 2 testing indicated that deactivation of > 90% fentanyl can be achieved in 96 h time period. In this case, increased deactivation efficiency was observed with an increase

• Increased deactivation efficiency was observed on increasing the thickness of the

Conclusion

•The carbon fabric disposal system was effective at deactivation of transdermal patches of fentanyl. This disposal method resulted in > 90% deactivation of

Acknowledgement: This research project has been funded by Verde Environmental Technologies, Burnsville MN 55337